

AUDIO CABLE

16 AWG 2 CONDUCTOR

STRANDED CABLE



209-2315 SERIES

Part Number:	Description:
209-2315	Audio Cable, Stranded, Unshielded, 16 AWG 2 C, White 500 ft.
209-2315/BK	Audio Cable, Stranded, Unshielded, 16 AWG 2 C, Black 500 ft.
209-2315/PR	Audio Cable, Stranded, Unshielded, 16 AWG 2 C, Purple 500 ft.
209-2315/BL	Audio Cable, Stranded, Unshielded, 16 AWG 2 C, Blue 500 ft.

DESCRIPTION

16 AWG 2 Conductor Stranded Bare Copper, Unshielded with an overall jacket.

CONSTRUCTION

Conductor count: 2
 Shape: Round
 Rip cord: Yes

CONDUCTORS

Material: Stranded bare copper
 Trade size: 16 AWG
 Stranding: 65/0.16 mm
 Insulation material: Polyvinyl Chloride (PVC)
 Insulation O.D.: 0.08 in. (2.10 mm)
 Insulation color: Red, Black

JACKET

Material: Polyvinyl Chloride (PVC)
 Thickness: 0.02 in. (0.50 mm)
 O.D.: 0.20 in. (5.10 mm)
 Marking: VERTICAL 4002107 c(ETL)usAUDIO CABLE 16AWG 2 COND
 65 STRANDED OXYGEN FREE CMR FT4 CL3R RoHS 500FT 53307M0723102

MECHANICAL

Temperature rating: 75° C
 Before Tensile Strength (Mpa): ≥13.8
 Aging Elongation (%): ≥100
 Aging Condition (°Cxhrs): 100x168
 After Tensile Strength (Mpa): ≥85% of unaged
 Aging Elongation (%): ≥50% of unaged
 Cold Bend (-20±2° Cx4hrs): No Crack

SAFETY


NFPA 70 (NEC®) rating: CMR/CL3
 Voltage rating: 300 V RMS

PACKED WEIGHT

209-2315: 15 lb (6.8 kg)
 209-2315/BK: 15 lb (6.8 kg)
 209-2315/PR: 15 lb (6.8 kg)
 209-2315/BL: 15 lb (6.8 kg)

APPLICATION

- Sound and Audio
- Intercom Systems
- Indoor Applications

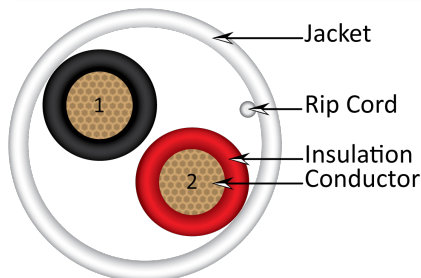

VERTICAL CABLE

951.696.7772 California
 800.749.2447 Florida
 845.391.8318 New York
 713.322.7242 Texas



verticalcable.com

Rev. 4/2024
 Subject to change without notice.