

# AUDIO CABLE

## 16 AWG 4 CONDUCTOR

### STRANDED CABLE



## 209-2316 SERIES

Part Number:	Description:
209-2316	Audio Cable, Stranded, Unshielded, 16 AWG 4 C, White 500 ft.
209-2316/BK	Audio Cable, Stranded, Unshielded, 16 AWG 4 C, Black 500 ft.
209-2316/PR	Audio Cable, Stranded, Unshielded, 16 AWG 4 C, Purple 500 ft.

## DESCRIPTION

16 AWG 4 Conductor Stranded Bare Copper, Unshielded with an overall jacket.

### CONSTRUCTION

Conductor count: 4  
 Shape: Round  
 Rip cord: Yes

### CONDUCTORS

Material: Stranded bare copper  
 Trade size: 16 AWG  
 Stranding: 65/0.16 mm  
 Insulation material: Polyvinyl Chloride (PVC)  
 Insulation O.D.: 0.08 in. (2.10 mm)  
 Insulation color: Red, Black, White, Green

### JACKET

Material: Polyvinyl Chloride (PVC)  
 Thickness: 0.02 in. (0.50 mm)  
 O.D.: 0.25 in. (6.30 mm)  
 Marking: VERTICAL 4002107 c(ETL)us AUDIO CABLE 16AWG 4 COND  
 65 STRANDED OXYGEN FREE CMR FT4 CL3R RoHS 500FT 53308M0717202

### MECHANICAL

Temperature rating: 75° C  
 Before Tensile Strength (Mpa): ≥13.8  
 Aging Elongation (%): ≥100  
 Aging Condition (°Cxhrs): 100x168  
 After Tensile Strength (Mpa): ≥85% of unaged  
 Aging Elongation (%): ≥50% of unaged  
 Cold Bend (-20±2° Cx4hrs): No Crack

### SAFETY



NFPA 70 (NEC®) rating: CMR/CL3  
 Voltage rating: 300 V RMS

### PACKED WEIGHT

209-2316: 26.3 lb (11.9 kg)  
 209-2316/BK: 27.5 lb (12.5 kg)  
 209-2316/PR: 27 lb (12.3 kg)

## APPLICATION

- Sound and Audio
- Intercom Systems
- Indoor Applications

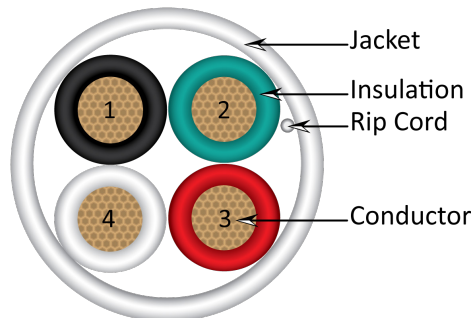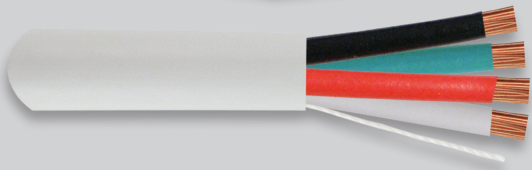

## VERTICAL CABLE

951.696.7772 California  
 800.749.2447 Florida  
 845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 11/2023  
 Subject to change without notice.