

# AUDIO CABLE

## 14 AWG 2 CONDUCTOR

### STRANDED CABLE



## 209-2320 SERIES

Part Number:	Description:
209-2320	Audio Cable, Stranded, Unshielded, 14 AWG 2 C, White 500 ft.
209-2320/BK	Audio Cable, Stranded, Unshielded, 14 AWG 2 C, Black 500 ft.
209-2320/PR	Audio Cable, Stranded, Unshielded, 14 AWG 2 C, Purple 500 ft.

## DESCRIPTION

14 AWG 2 Conductor Stranded Bare Copper, Unshielded with an overall jacket.

### CONSTRUCTION

Conductor count: 2  
Shape: Round  
Rip cord: Yes

### CONDUCTORS

Material: Stranded bare copper  
Trade size: 14 AWG  
Stranding: 41/0.25 mm  
Insulation material: Polyvinyl Chloride (PVC)  
Insulation O.D.: 0.08 in. (2.10 mm)  
Insulation color: Red, Black, White, Green

### JACKET

Material: Polyvinyl Chloride (PVC)  
Thickness: 0.02 in. (0.60 mm)  
O.D.: 0.25 in. (6.40 mm)  
Marking: VERTICAL 5024318 c(ETL)usAUDIO CABLE 14AWG 2 COND 41 STRANDED OXYGEN FREE CMR FT4 CL3R RoHS XXXFT 53203M0725102

### MECHANICAL

Temperature rating: 75° C  
Before Tensile Strength (Mpa):  $\geq 13.8$   
Aging Elongation (%):  $\geq 100$   
Aging Condition (°Cxhrs): 100x168  
After Tensile Strength (Mpa):  $\geq 85\%$  of unaged  
Aging Elongation (%):  $\geq 50\%$  of unaged  
Cold Bend (-20 $\pm$ 2° Cx4hrs): No Crack

### SAFETY


NFPA 70 (NEC®) rating: CMR/CL3  
Voltage rating: 300 V RMS

### PACKED WEIGHT

209-2320: 22 lb (10 kg)  
209-2320/BK: 22 lb (10 kg)  
209-2320/PR: 22 lb (10 kg)

## APPLICATION

- Sound and Audio
- Intercom Systems
- Indoor Applications

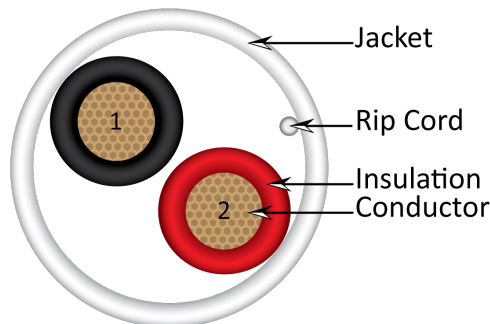

## VERTICAL CABLE

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York  
713.322.7242 Texas



verticalcable.com

Rev. 4/2024  
Subject to change without notice.