


# Assembly Instructions

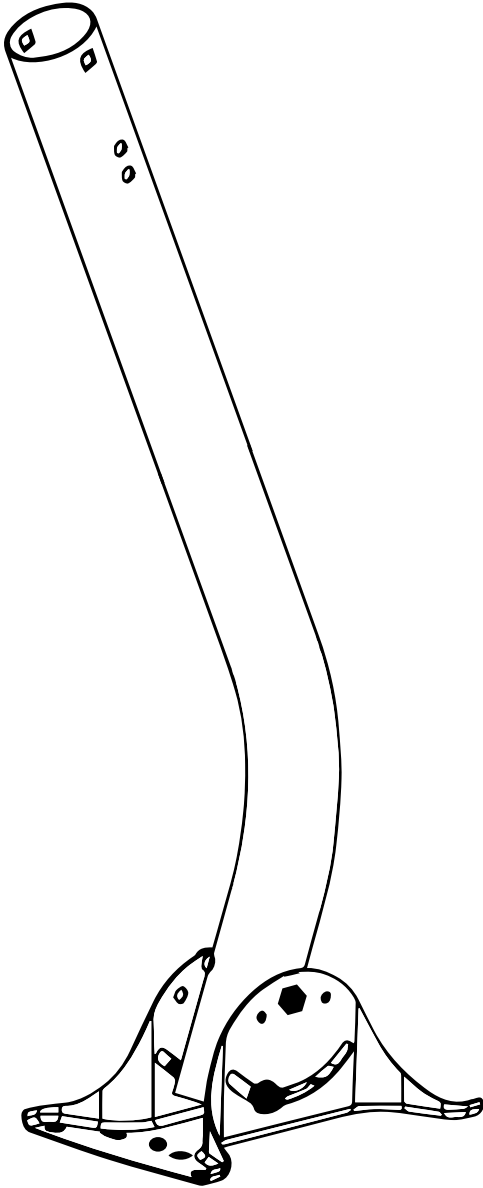

**Step 1. (Fig.1)** Attach the J-pole to the Base Mounting Bracket using the Long Hex Head Bolt and Small Flange Nut.

**Step 2 (Fig. 2)** Attach the J-pole to the Base Mounting Bracket for elevation adjustment using the two Small Carriage Bolts and Small Flange Nuts.

**Package Contents and Accessories**

- J-pole (1) **A**
- Base Mounting Bracket (1) **B**
- Small Carriage Bolt (2) **C**
- Small Flange Nut (3) **D**
- Long Hex Head Bolt (1) **E**

Fig 1



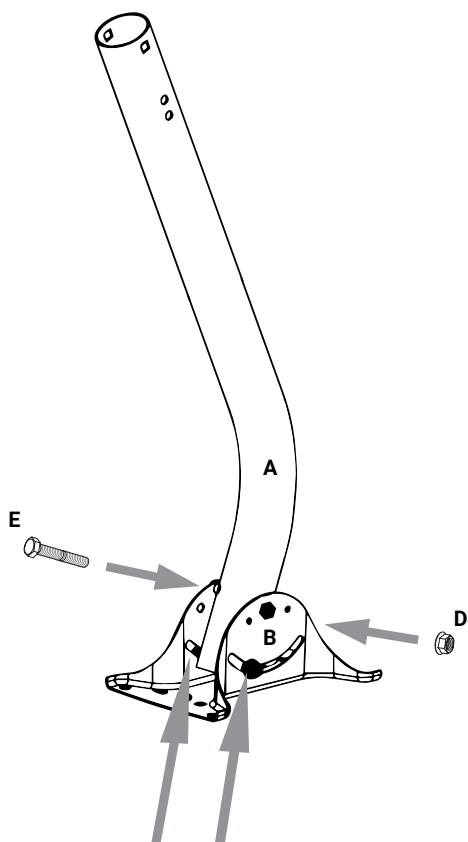


Fig 2

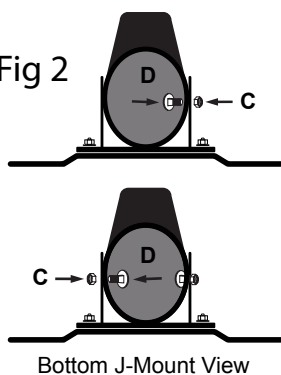

**Step 3 (Fig.3)** Attach the assembled mount to a surface using four Large Lag Screws. \*Not Include

Fig 3

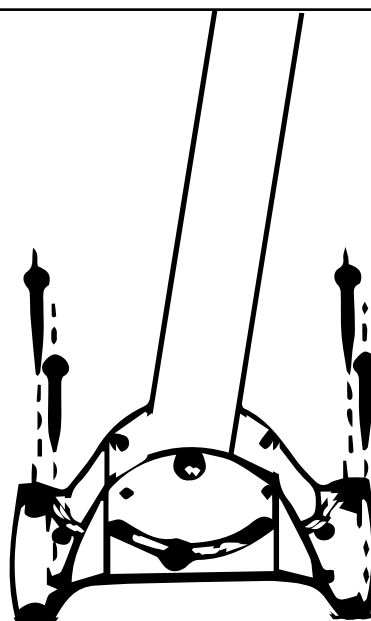

**MORE INFORMATION**

Additional product information including videos and frequently asked questions is available at [www.channelmaster.com/support](http://www.channelmaster.com/support)

Warranty Information is available online at [www.channelmaster.com/warranty](http://www.channelmaster.com/warranty)

[www.channelmaster.com](http://www.channelmaster.com)



**Rooftop Installation Warning!**

Use caution when installing antennas and accessories on a rooftop, near power lines and electrical equipment. Stay away from power lines. If you or the antenna comes in contact with power wires or other electrical equipment you could be at risk of serious injury or even death. If any part of the antenna should come in contact with a power line, call your local power company for assistance, DO NOT TRY TO REMOVE IT YOURSELF. If you are concerned about nearby power lines coming in contact with you or your antenna